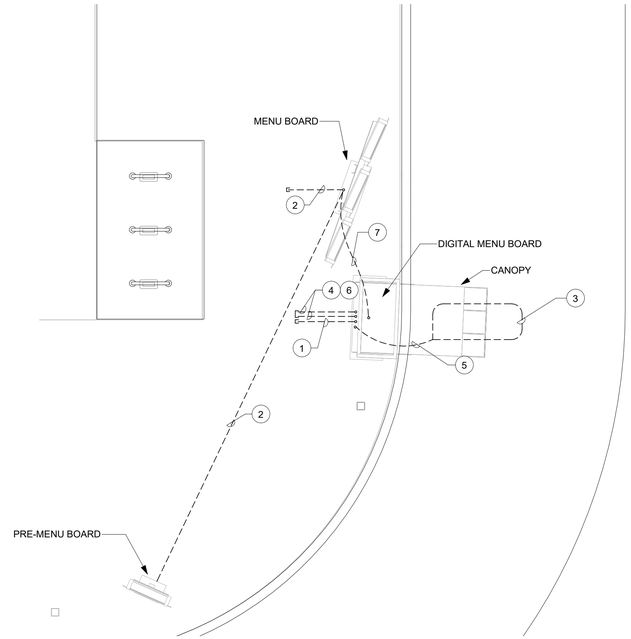

2 D.T. MENU BOARD DETAIL

Scale: 1/4" = 1'-0"

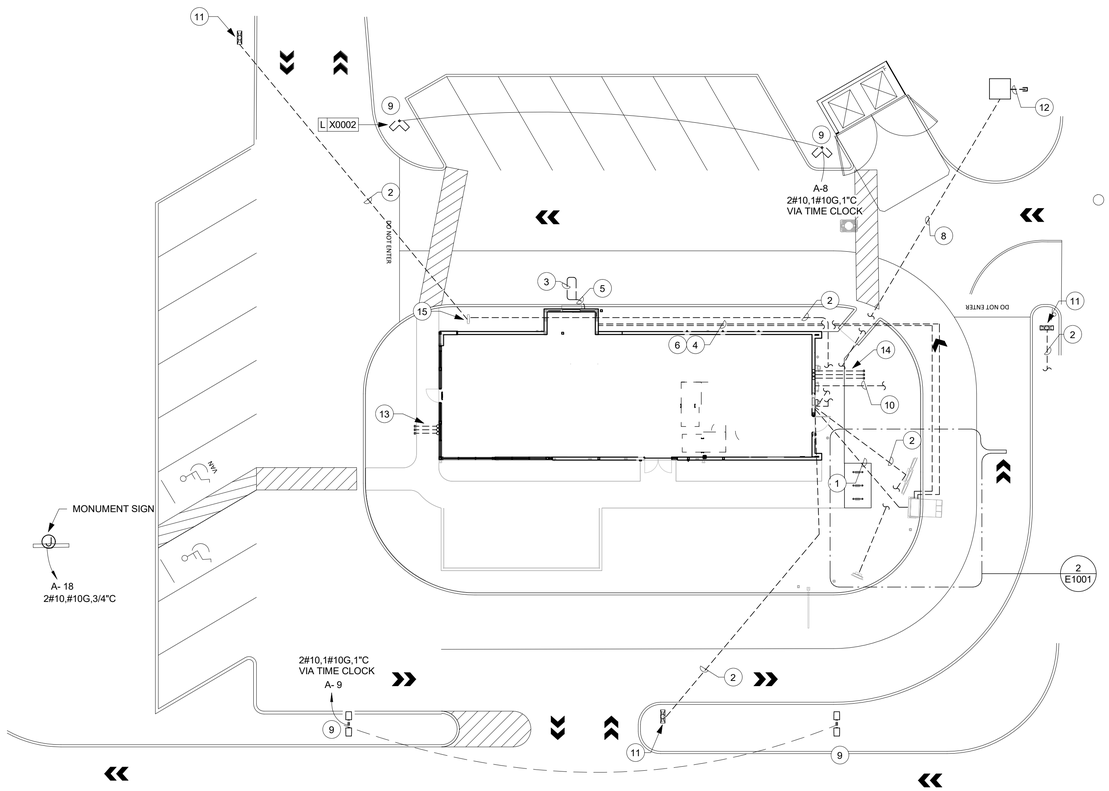

1 SITE PLAN - ELECTRICAL

Scale: 1/16" = 1'-0"

0 8' 16' 32'

Scale: 1/16" = 1'-0"

N

KEYED NOTES (XX)

1. 1" CONDUIT TO BE RAN UNDERGROUND FROM ORDER SCREEN TO STARBUCKS PANELS.
2. 1" CONDUIT TO BE RAN UNDERGROUND FROM DRIVE THRU SIGNS AND MENU BOARDS TO STARBUCKS PANELS.
3. DETECTOR LOOP TO BE CENTERED ON DT WINDOW/ORDER SPEAKER. COORDINATE WITH GC,. TO BE 2" BELOW DT LANE PAVEMENT. SEE DETAIL ON THIS SHEET.
4. 1" CONDUIT TO BE RAN UNDERGROUND FROM ORDER SCREEN TO DT POS STUBBED UP IN WALL. COORDINATE LOCATION OF STUB UPS PRIOR TO POURING FOOTINGS.
5. 1"C FOR DETECTOR LOOP TO BE RAN UNDERGROUND REAR OF BUILDING, STUBBED UP WALL TO ABOVE CEILING.
6. 1" CONDUIT TO BE RAN UNDERGROUND FROM ORDER SCREEN TO DT POS STUBBED UP IN WALL FOR AUDIO/VIDEO AND DETECTOR LOOP DATA. COORDINATE LOCATION OF STUB UPS PRIOR TO POURING FOOTINGS.
7. 1"CONDUIT FOR LED LIGHT ON ORDER SCREEN CANOPY TO CONNECT WITH CONDUIT FOR MENU BOARDS
8. INCOMING ELECTRICAL SERVICE FROM PADMOUNT TRANSFORMER. SEE SINGLE-LINE DIAGRAM FOR MORE INFORMATION.
9. COORDINATE EXACT LOCATION, FIXTURE TYPE, AND QUANTITY WITH LIGHTING VENDOR AND STARBUCKS CONSTRUCTION SUPERVISOR PRIOR TO ROUGH IN.
10. PROVIDE (3) 4" CONDUITS WITH PULLSTRINGS TO TELECOMMUNICATION COMPANY POLE. COORDINATE WITH UTILITY COMPANY AND CIVIL. TERMINATE CONDUIT IN TENANT SPACE ABOVE MANAGERS DESK. COORDINATE WITH TENANT DRAWINGS.
11. DT DIRECTIONAL SIGN.
12. PRIMARY FEEDER FROM UTILITY COMPANY POLE. PROVIDE (2) 4" CONDUITS WITH PULLSTRINGS COORDINATE WITH UTILITY COMPANY AND CIVIL.
13. (3) SPARE 1" CONDUITS TO BE RUN THROUGH FOUNDATION WALL TO FRONT OF BUILDING. ALL CONDUITS TO BE TERMINATED ABOVE CEILING. VERIFY LOCATIONS FOR STUB UP WITH TENANT'S REPRESENTATIVE.
14. (3) SPARE 1" CONDUITS TO BE RUN THROUGH FOUNDATION WALL OUT REAR OF BUILDING. ALL CONDUITS TO BE TERMINATED ABOVE CEILING. VERIFY LOCATIONS FOR STUB UP WITH TENANT'S REPRESENTATIVE.
15. THANK YOU/EXIT SIGN.

GENERAL NOTES

1. PROVIDE PULL STRINGS IN ALL CONDUITS FOR STARBUCKS USE.
2. CONDUITS TO STUB UP THRU FUTURE FOUNDATIONS OF STARBUCKS EQUIPMENT. REFER TO TENANT IMPROVEMENT DRAWINGS.

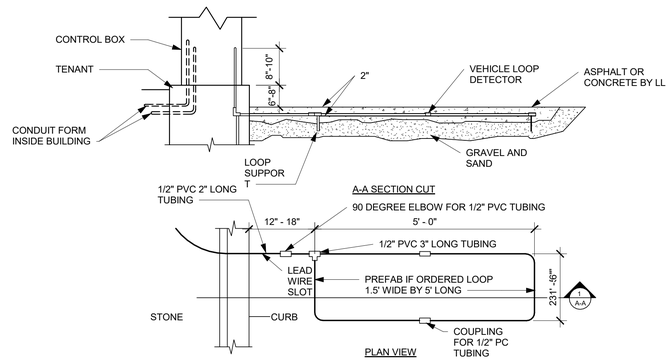

4 DT SENSOR LOOP DETAIL

Scale: N.T.S

GPD Engineering and Architecture
Professional Corporation - C3879

520 S. MAIN ST., SUITE 2531
AKRON, OH 44311
PHONE: 330.572.2100
FAX: 330.572.2101

Copyright: GPD Engineering and Architecture Professional Corporation 2020

REV.	DATE	DESCRIPTION

WHITSETT
6405 BURLINGTON RD
WHITSETT, NC 27377

SITE PLAN - ELECTRICAL

	DATE
PERMIT	--/--/----
BID	--/--/----
CONSTRUCTION	--/--/----
RECORD	--/--/----

PROJECT MANAGER	DESIGNER
AK	AS

JOB NO.
2020379.16

E1001